


Transducer Products

Line Array Technology

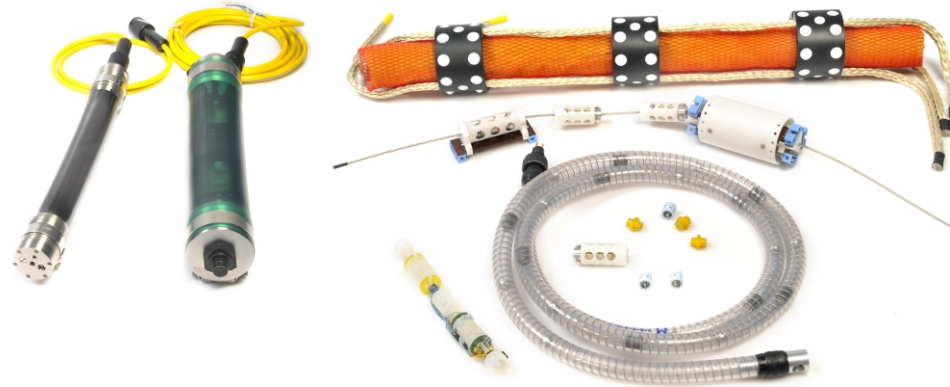

Standard Analogue Line Array Configurations

Model	Outline Description	Module Options (Configuration dependent)					Towed (T) or Static (S) Deployment	Maximum Acoustic Channels	Ch. Sensitivity Options (dB re 1 V/uPa)	Frequency Response (kHz)	Ch. Front End Noise Floor (dBVrtHz)	Non Acoustic Sensors
		Dia (mm)	Max. Length (m)	Maximum Axial Load (kg)	Minimum Bend Radius (mm)	Max. Op Depth (m)						
LA-HF1	High freq. aperture based on use of JS-L32 Hyd	32	30	400	200	1000	T or S	33	-182	0.006 to 42	-165dB @ 12.8 kHz	Options Available
		53	50	1000	600	1000	T or S	47				
		89	50	2000	700	1000	T	105				
LA-HF2	High freq. aperture based on use of JS-L16 Hyd	53	50	1000	600	1000	T or S	47	-172	0.006 to 24	-168dB @ 12.8 kHz	Options Available
		89	50	2000	900	1000	T	105				
LA-MF	Med. freq. aperture based on use of JS-L8 Hyd	53	50	1000	600	1000	T or S	47	-164	0.006 to 8	-165dB @ 4.0 kHz	Options Available
		89	50	2000	700	1000	T	105				
LPA-HF	Low profile array in static or towed configuration based on JS-LPA-30	15	15	50	75	250	T or S	33	-170	0.2 to 25	-160dB @ 12.8 kHz	Options Available
		18	50	50	30	250	S	33				
LPA-MF	Low profile array in static or towed configuration based on JS-L8 Hyd	32	30	140	200	1000	T or S	33	-164	0.006 to 8	-165dB @ 4.0 kHz	Options Available
		34	50	140	60	1000	S	33				



Indicated values are nominal and may be subject to change.
Other configuration options are available.
Digital variants may be available upon request.

J + S Ltd

Riverside Road, Pottington Business Park, Barnstaple,
Devon, EX31 1LY
Tel: +44 (0) 1271 337500 Fax: +44 (0) 1271 337501
email: transducers@jands.co.uk
www.jands.co.uk